EHRLE®
www.ehrle.com
The better way to clean

High pressure cleaner

Cold water, mobile - series 3x3

KD823

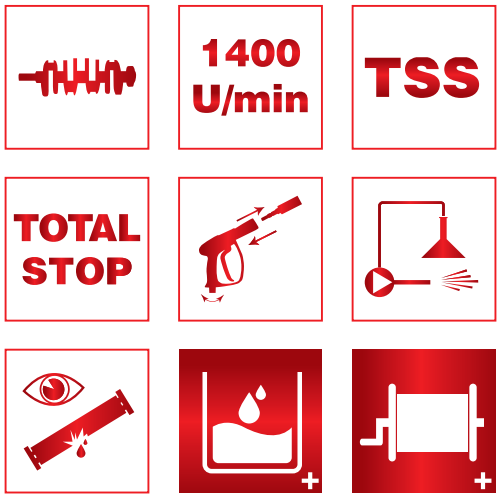

Type		*KD823-Standard*	*KD823-Premium*
Voltage	1/ 230V/ 50Hz	► 10m HP-Hose DN08 - 315bar ► Trigger-Gun with swivel ► Spray-Lance 900mm c/w Vario-Nozzle ► Stainless-Steel Jet-Nozzle 25° ► 15l Cleaning-Detergent tank ► Detergent-Supply c/w Low-Pressure Injector and metering-valve	► Hose-Reel ► 15m HP-Hose DN08 - 315bar ► Trigger-Gun with swivel ► Spray-Lance 900mm c/w Nozzle-Protection ► Stainless-Steel Jet-Nozzle 25° ► Spray-Lance 900mm c/w Rotary-Nozzle ► 17l Water-Storage tank ► Water-Supply separation acc. water reg. ► Chemical supply in high-pressure Jet c/ wMetering-valve
Operating pressure	30-140bar/ 3-14MPa		
Max. pressure	165bar/ 16,5MPa		
Discharge capacity	300 - 720l/h		
Nozzle size	045		
Max. Inlet temperature	45°C		
Pump speed	1400rpm		
Connected load	3,2kW / 14,7A		
Electrical protection	16A slow-blowing		
Weight net / with package		51,8 kg / 71,8 kg	55,8 kg / 75,8 kg
Dimensions device / with package (LxWxH)		805 x 485 x 950 mm / 790 x 595 x 810 mm	830 x 485 x 950 mm / 790 x 595 x 810 mm
Self-supporting, robust, rotation-moulded device-chassis, impact-resistant device-cover made of ABS, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, start-stop system with switch-off delay, total-switch-off after 20min, unloader safety-valve c/w infinitely variable pressure and quantity regulation, 2 large rubber wheels for rough terrain with rubber stand, storage possibility for all accessories, robust rotary on-off switch, 5,0m connection cable, removable ergonomic drawbar			
Art. No.		562001	562002